


Ceiling Cassette -1way- FDTS

Model No.
FDTS45KXE6F
FDTS71KXE6F



Remote control (option)




Individual flap control system

Two directions of air flow can be controlled individually by flap control system.




The flap can swing within the range of upper and lower flap position selected with wired remote control.



*The wireless remote control is not applicable to the individual flap control system.


Compact design

Indoor unit size (W:1,150 x D:565) brings easy installation for 1,200 x 600 ceiling and Panel size (1,250 x 650) is suitable for 1,200 x 600 ceiling. Height is the industry's lowest height level 220mm and weight is 27/28kg only.



600mm Drain Pump

Drain can be discharged upward by 600mm from the ceiling surface close to the indoor unit. It allows a piping layout with a high degree of freedom depending on the installation location.



Wireless remote control







For wireless remote control simply attach an additional panel with infrared receiver on the right side of the main decorative panel.



RCN-TS-E2

Dimensions

All measurements in mm.

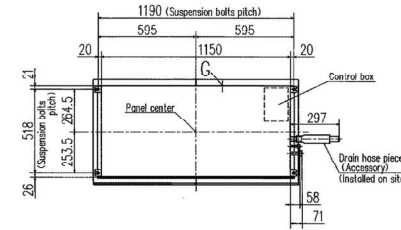

Make a space of 4000 or more between the units when installing more than one.

Specifications

Item	Model	FDTS45KXE6F	FDTS71KXE6F
Nominal cooling capacity	kW	4.5	7.1
Nominal heating capacity	kW	5.0	8.0
Power source		1 Phase 220-240V, 50Hz	
Power consumption	Cooling kW	0.04-0.04	0.09-0.09
	Heating kW	0.04-0.04	0.09-0.09
Sound power level	dB(A)	60	61
Sound pressure level	dB(A)	Hi:40 Me:38 Lo:35	Hi:46 Me:41 Lo:36
Exterior dimensions	mm	Unit:220x1150x565 Panel:35x1250x650	
Net weight	kg	Unit:27 Panel:5	Unit:28 Panel:5
Air flow	m ³ /min	Hi:12 Me:11 Lo:9.5	Hi:15 Me:12 Lo:9.5
Outside air intake		Possible	
Panel		TS-PSA-3AW-E	
Air filter, Q'ty		Pocket Plastic net x2 (Washable)	
Remote control(option)		wired:RC-EX3, RC-E5, RCH-E3 wireless:RCN-TS-E2	
Installation data		Liquid line:φ6.35(1/4") Gas line:φ12.7(1/2")	Liquid line:φ9.52(3/8") Gas line:φ15.88(5/8")

1. The data are measured under the following conditions (ISO-11). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
3. Power/HiH can be selected. Sound pressure level: FDTS45 42dB(A), FDTS71 49dB(A). Air flow: FDTS45 13m³/min, FDTS71 17m³/min.